




1. Download the driver file:

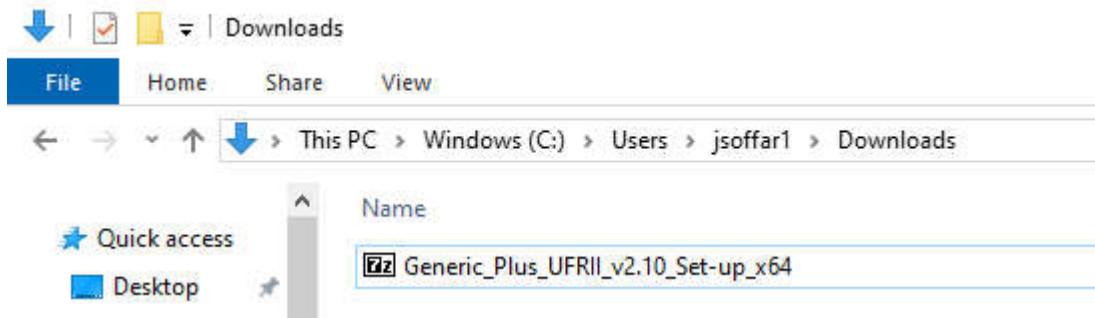


2. Double click or run the file.
3. Extract the files, we are extracting to the downloads folder for this guide

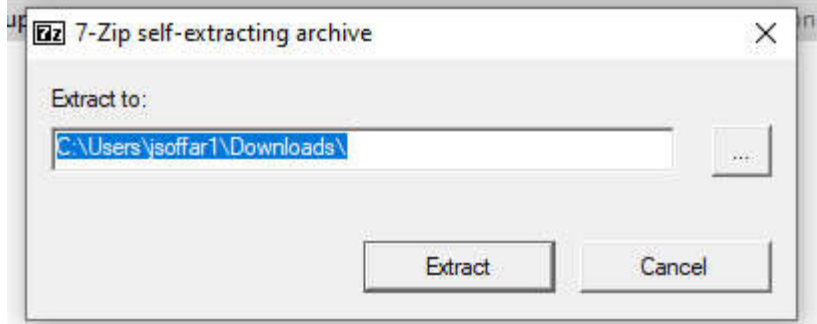


4. The files will extract and you will have a folder

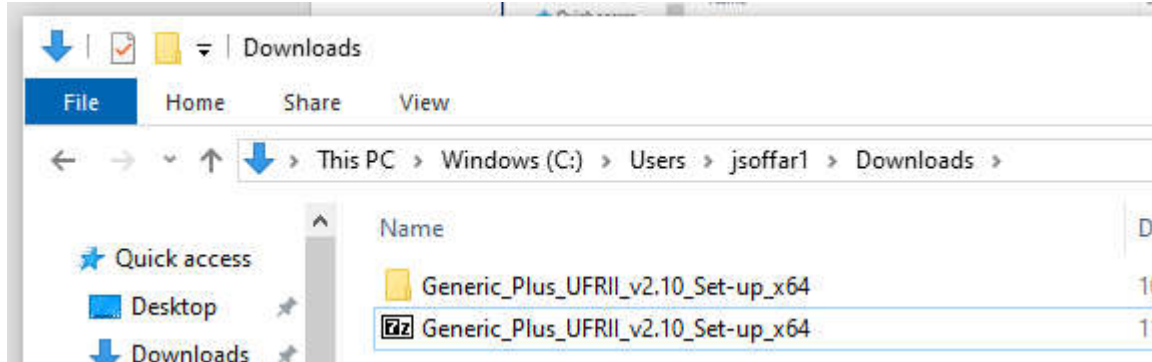


5. Double click or open the folder and you will see a list of files  
c\_Plus\_UFR11\_v2.10\_Set-up\_x64

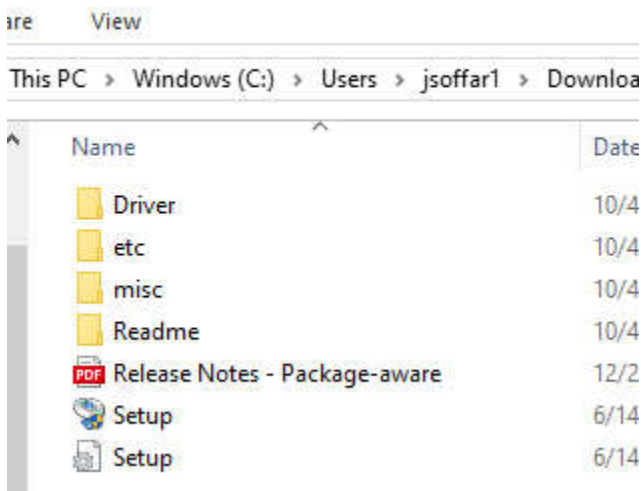


6. Double click or run the setup.exe application. You may need to click yes to allow it to run through User Account Control.

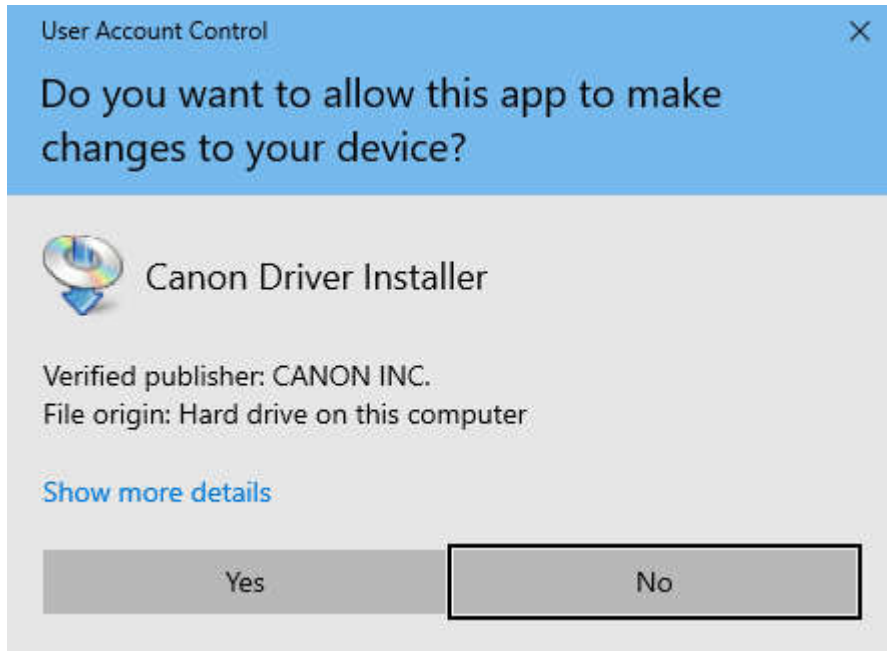


7. Then click Next on the driver to continue the installation.

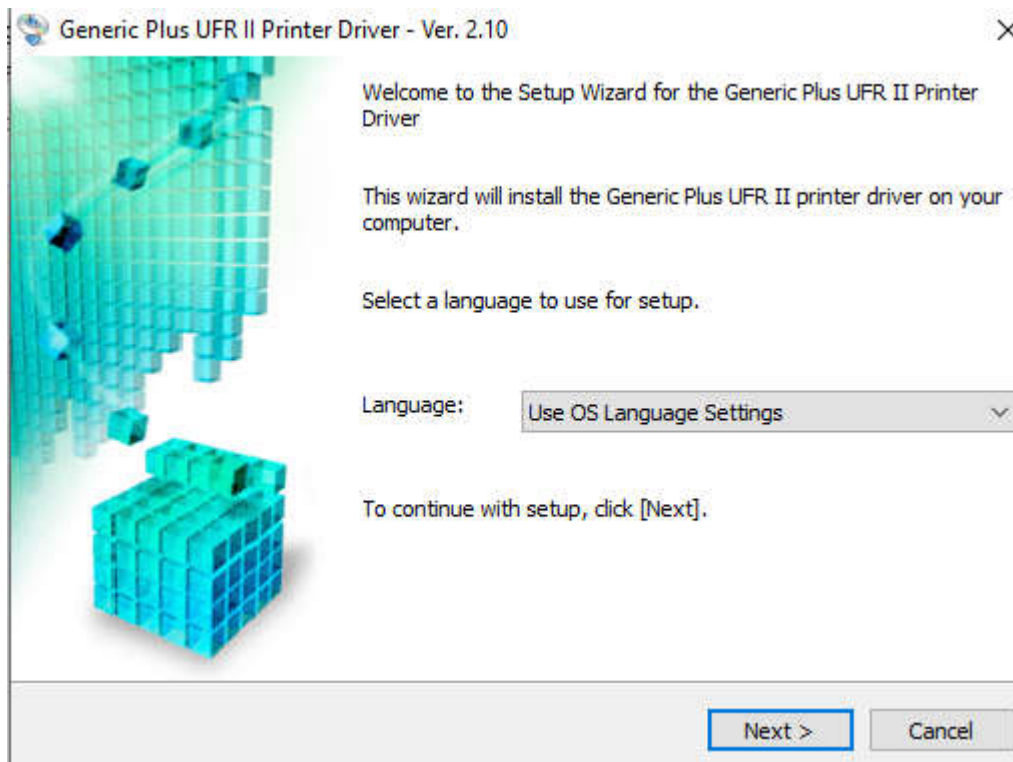


8. Click Yes.

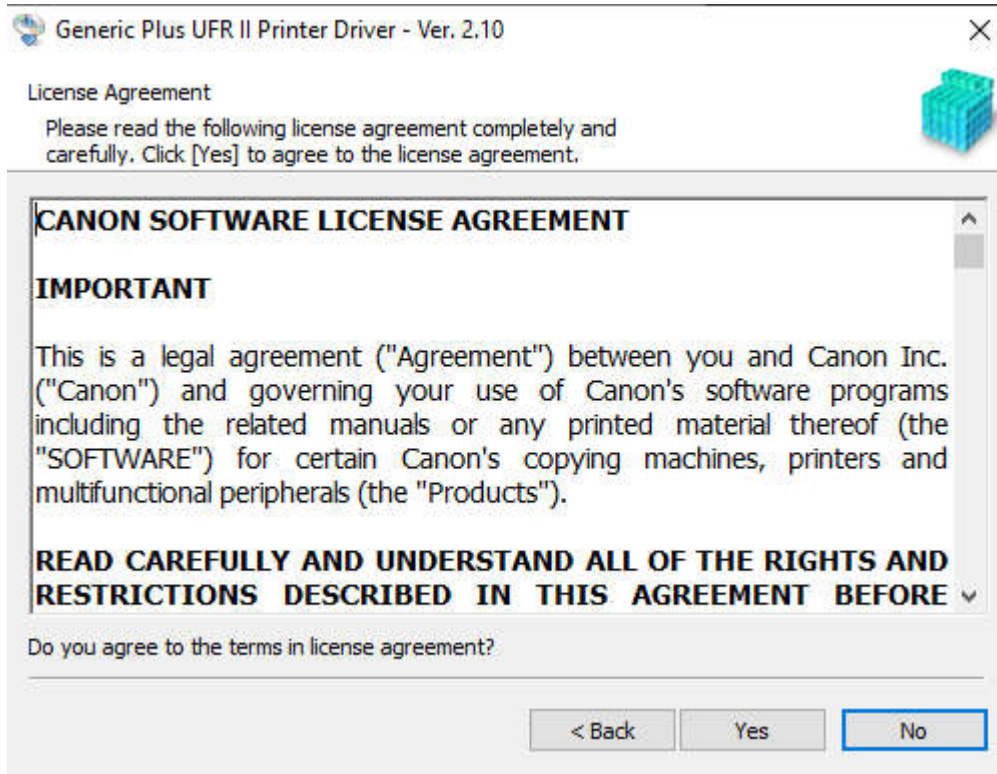

9. Select Custom and then Next.

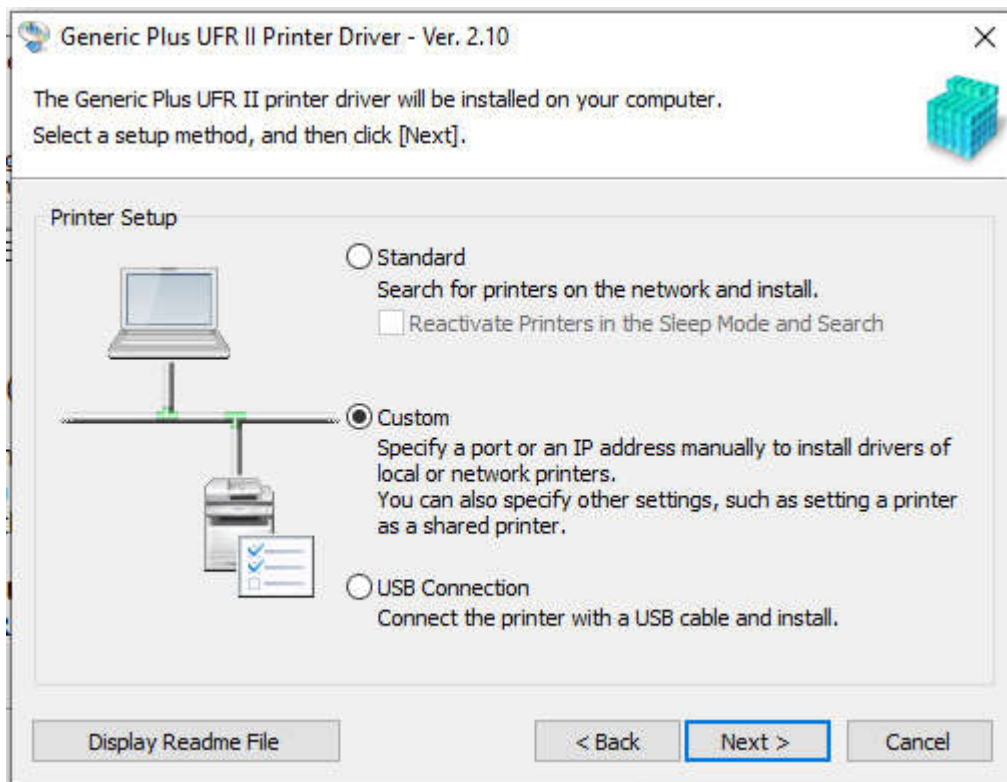


10. Select next.

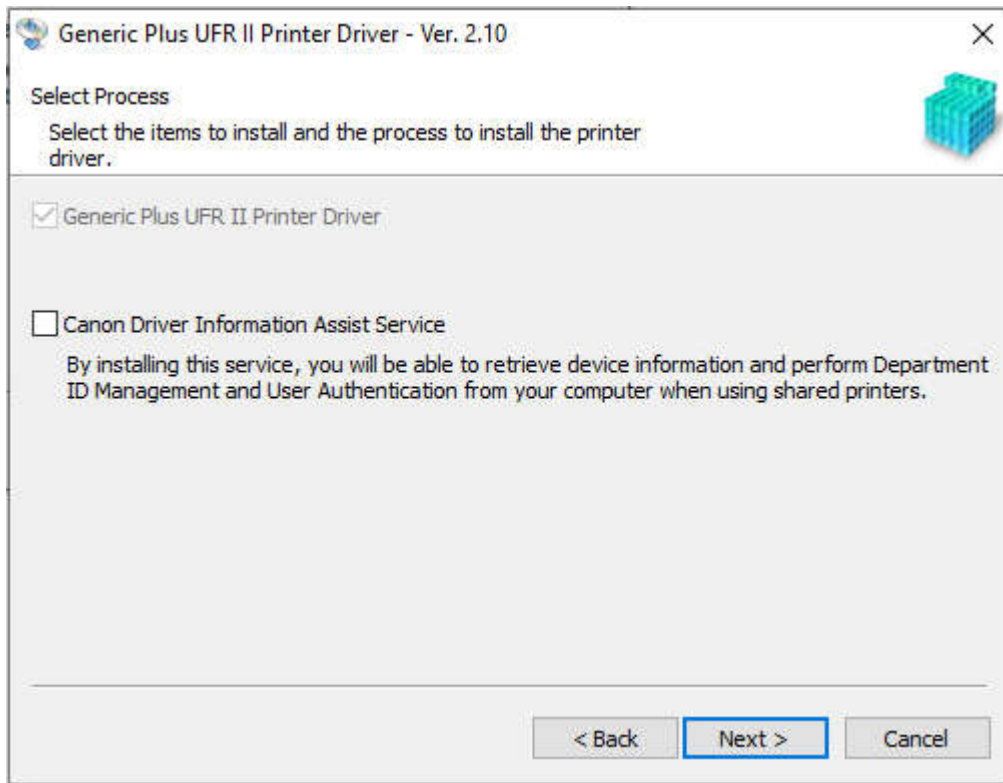

11. Make sure to uncheck **Auto Select**.

For printers on every floor (**Canon C5560i**), select **iR-ADV (Type 011)** then click next.  
For 366bwlp (**Canon 6575i**), select **iR-ADV (Type 008)** then click next.

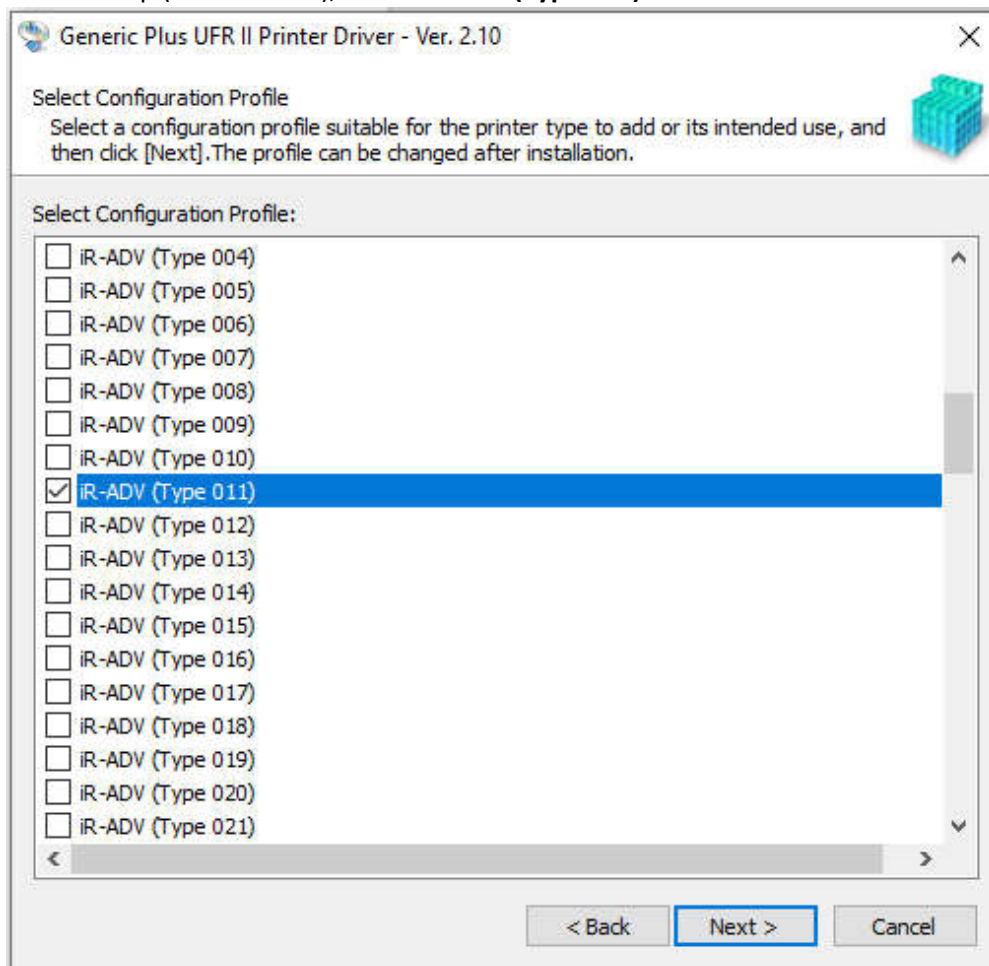

12. In this window you can give the printer a name for your use (red highlight), select it as the default printer (yellow highlight) if you like, and you will need to **click add port** (green highlight).

Generic Plus UFR II Printer Driver - Ver. 2.10

Printer Information  
Set the port to be used for the selected printer.  
Also, you can specify a name for the printer.

Selected Printer: Canon Generic Plus UFR II  
Use Driver: Canon Generic Plus UFR II Printer Driver Ver. 2.10  
Port: Not Set **Add Port...**

Printer Name: **Canon Generic Plus UFR II**

Configuration Profile: Auto Select **Change...**

**Set as Default**  
 Use as Shared Printer

Shared Name:

Devices: 1 (1 to 200) Current Printer: 1  
Number of Printers to Set: 2

< Back **Next >** Cancel

13. Select Standard TCP/IP Port

Add Port


Select the port to add, and then click [OK].

Port to Add:


- Appmon
- Local Port
- Network
- Standard TCP/IP Port**
- WSD Port

OK Cancel


14. Click Next

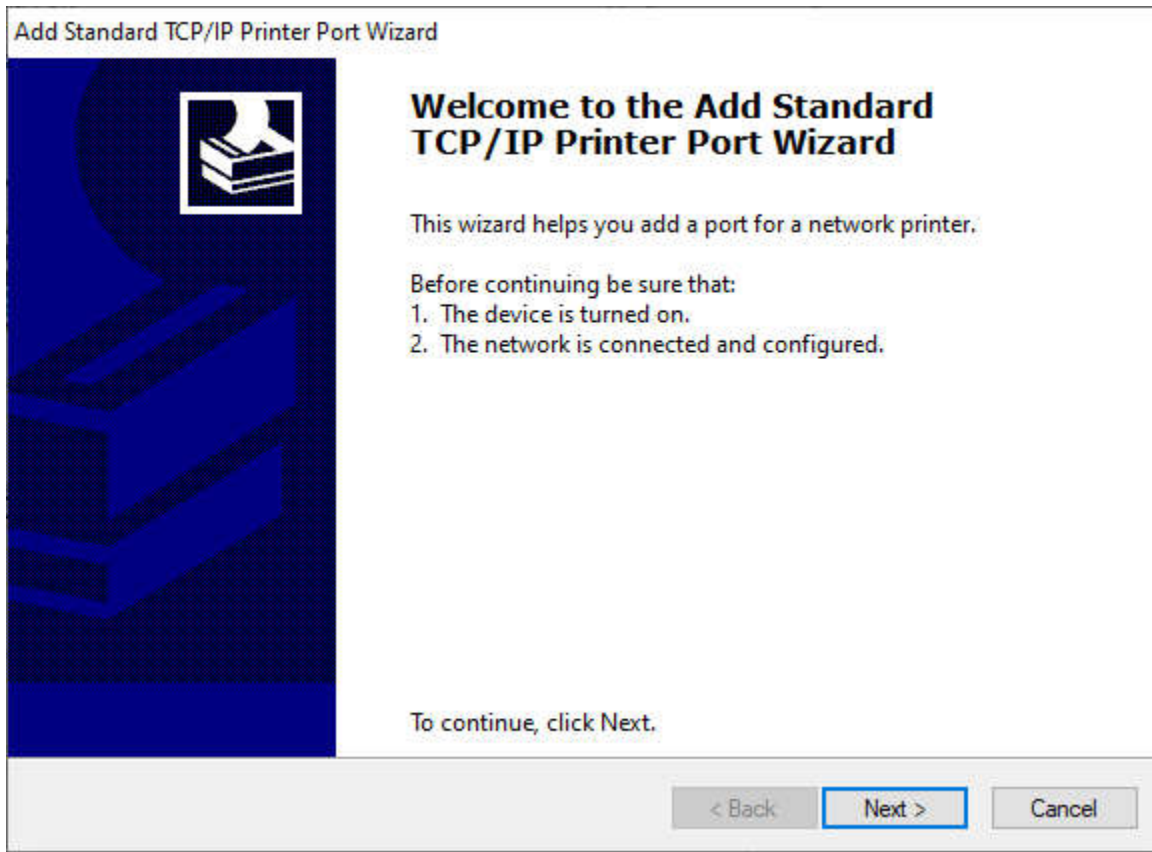


15. Type the full name of the printer you wish to add. Printers have labels on them telling you their name. I am adding secondlp which is the printer on the second floor. Make sure to add “.pha.jhu.edu” to the name of the printer so that the network will be able to find it. For secondlp, this means the full name will be “secondlp.pha.jhu.edu”. The port name will fill in by itself. Click Next.

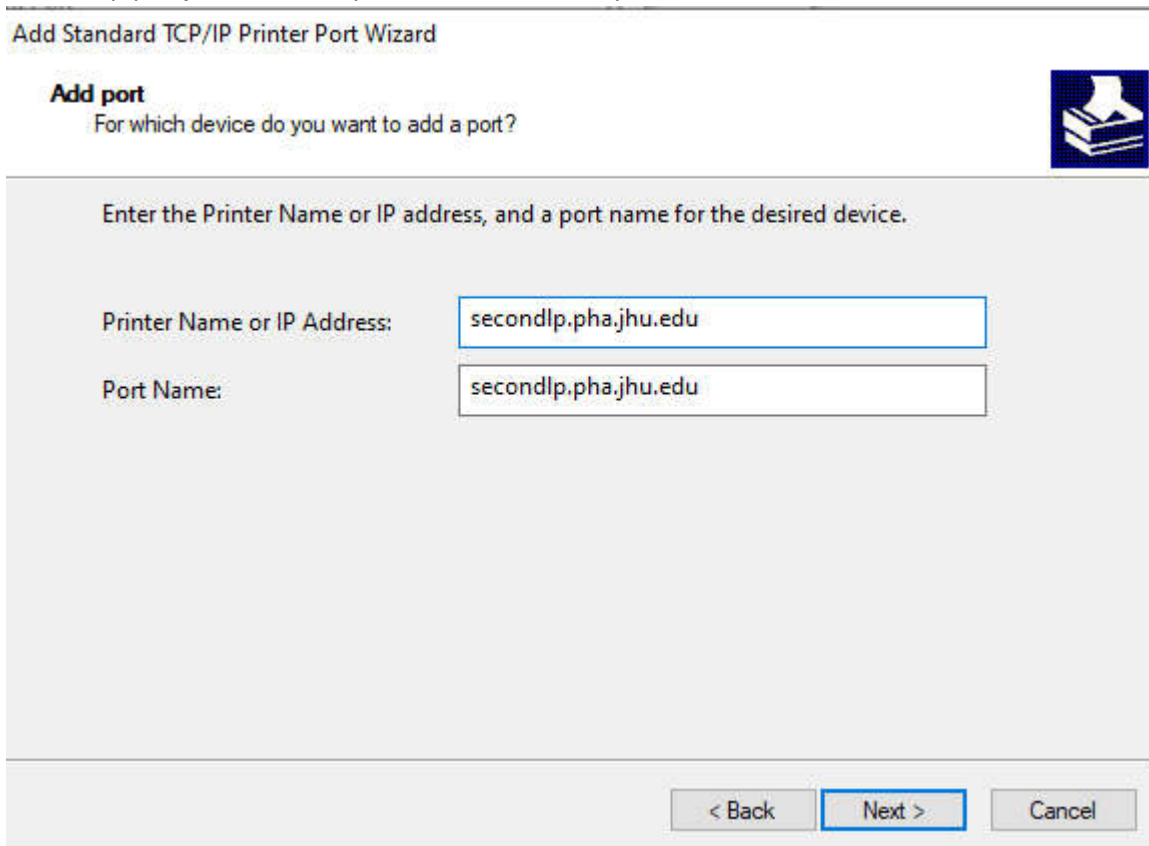


16. Click Finish

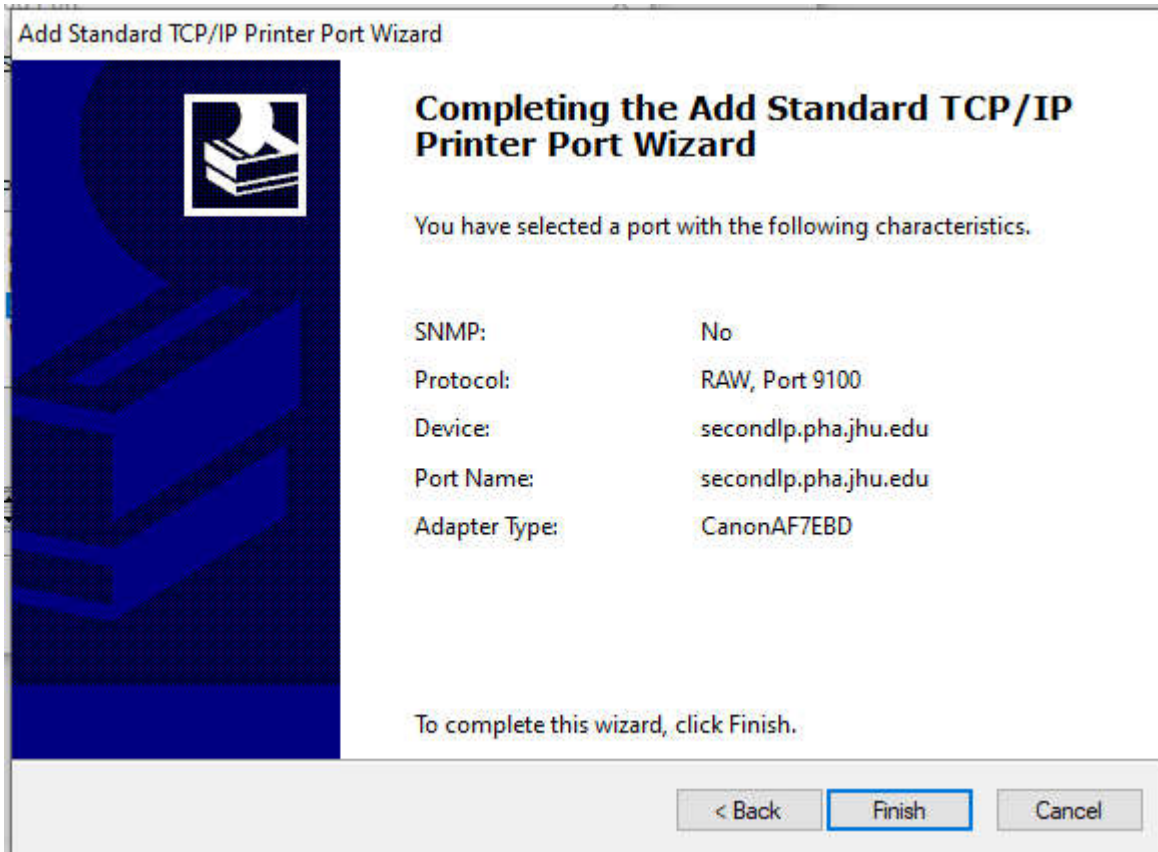

17. You'll be back at this window and can click next to install the printer driver

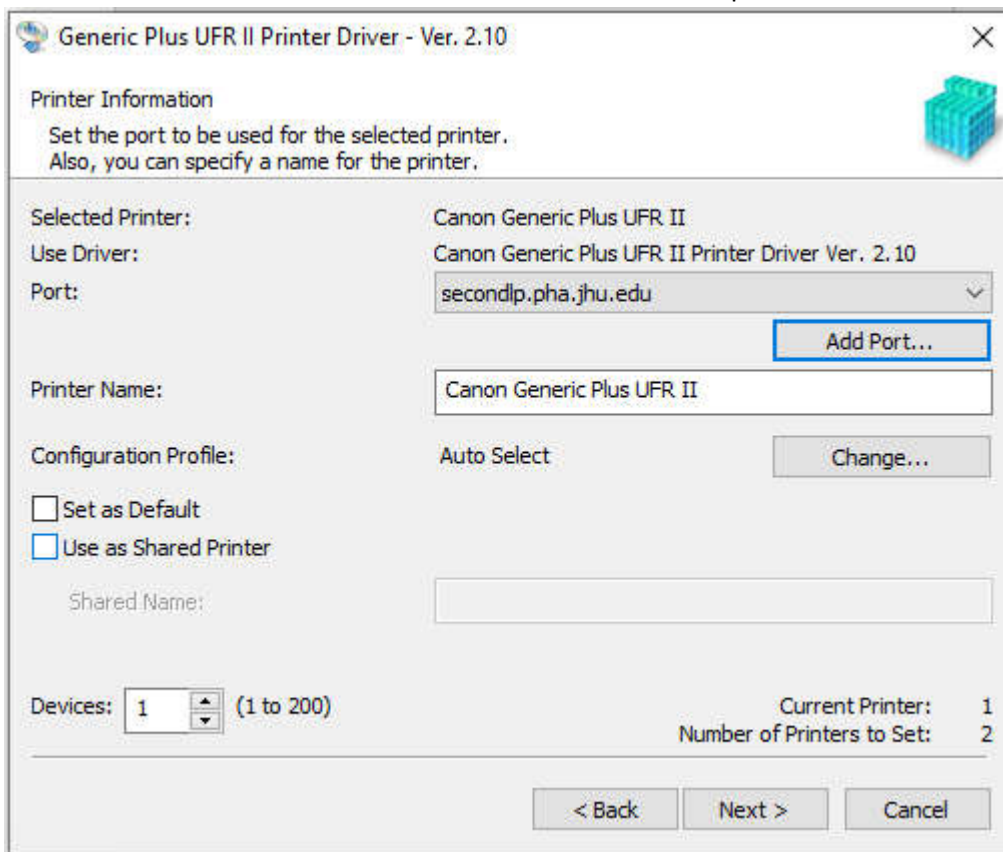

18. Click Start

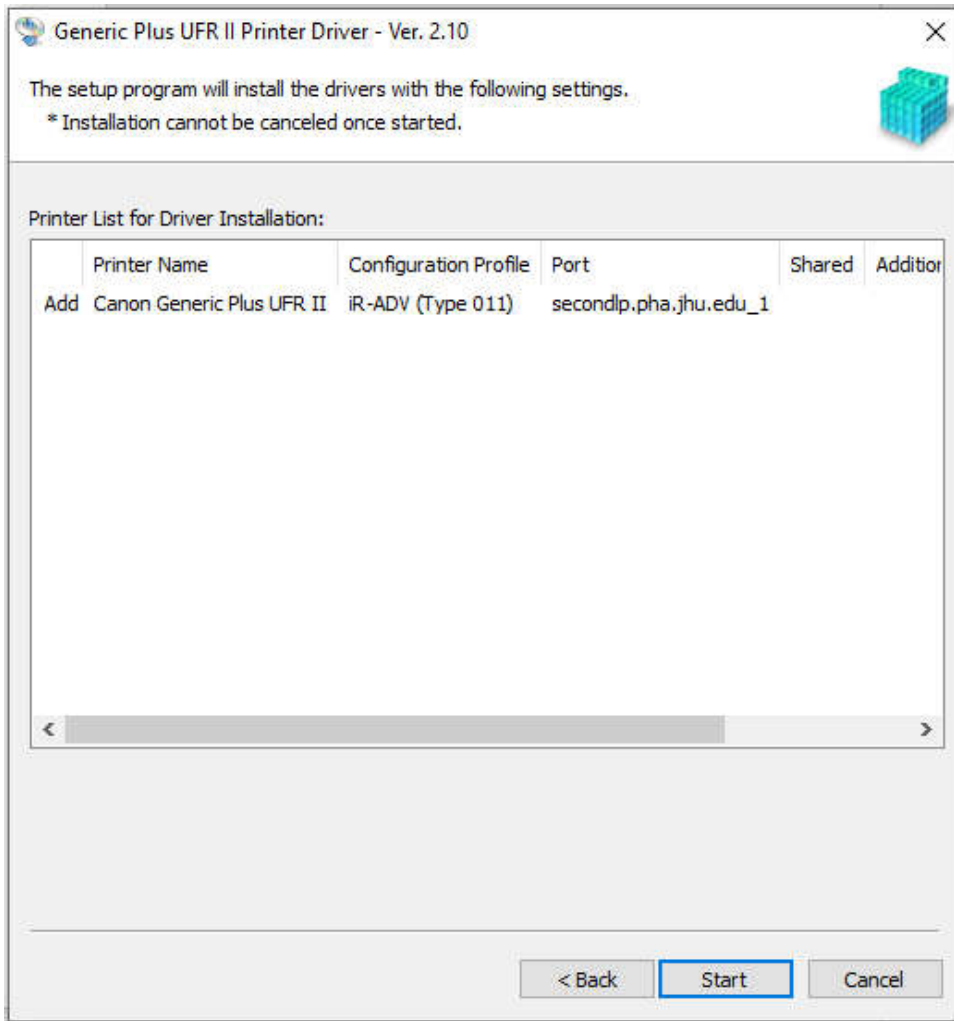

19. The printer will install, you can restart but usually it is unnecessary. Click exit and you should be able to use your printer!

